GAMCO
Commercial Restroom Accessories
Technical Data

RECESSED COVERALL ROLL TOWEL DISPENSER AND WASTE RECEPTACLE

PUSH BAR ROLL TOWEL DISPENSER

TW-12RP

Date: Project Name:

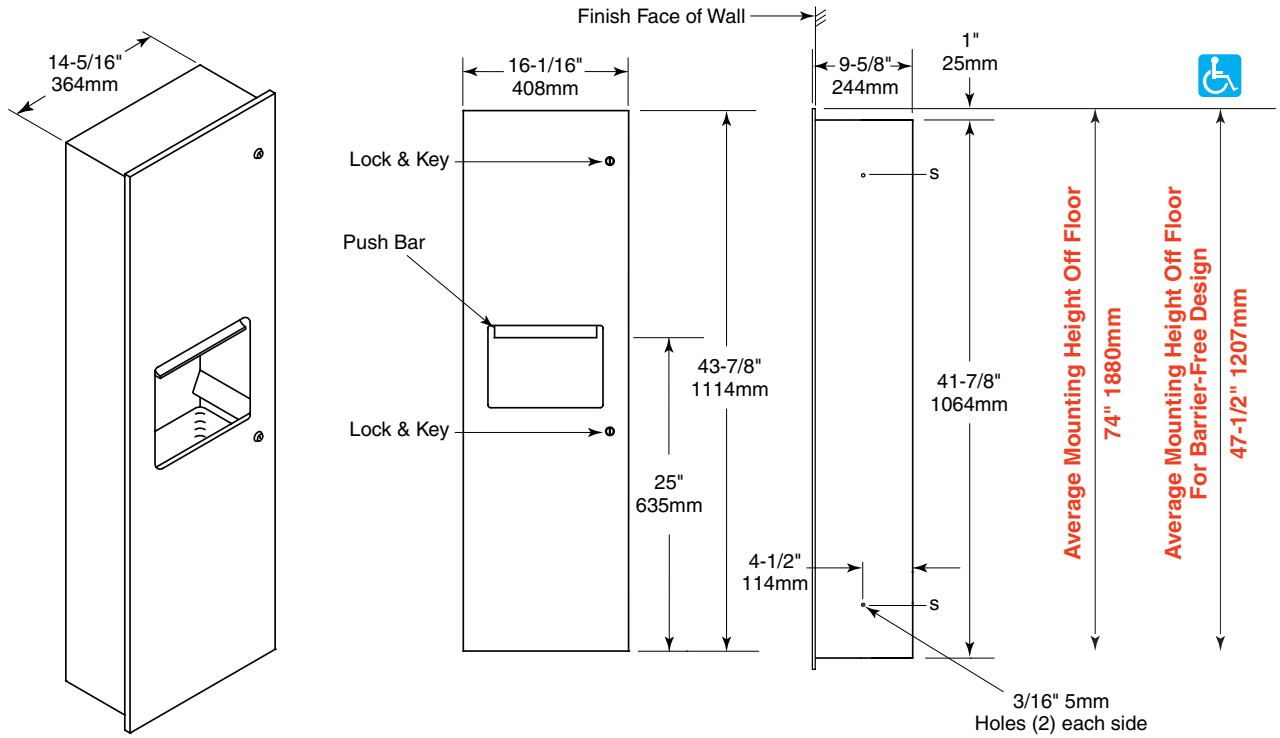

Rough Wall Opening
14-5/8" (371mm) Wide
42-3/8" (1073mm) High
9" (229mm) minimum
recessed depth

CONSTRUCTION:

Unit fabricated of type 304 stainless steel with exposed surfaces having a satin-finish. One piece seamless door construction, EXTRA HEAVY 18-gauge (1.2mm) with 5/8" (16mm) return for rigidity. Door is mounted to cabinet with continuous stainless steel piano hinge and fitted with two tumbler locks. Removable stainless steel waste container. All welded construction.

CAPACITY:

Accepts universal roll paper. 7-3/4" to 8" (197 to 203mm) wide up to 8" (203mm) in diameter. 1-1/2" to 2" (38 to 51mm) core. Waste capacity is 8-1/2-gallons (17-L).

OVERALL DIMENSIONS:

16-1/16" W x 43-7/8" H x 9-5/8" D (408 x 1114 x 244mm)

SYSTEM FEATURES:

- Towels are mainly dispensed when lower bar is pushed
- Towels are not exposed
- Easy to load paper
- Stub roll transfer system to elimintate paper waste

Recessed Coverall Roll Towel Dispenser and Waste Receptacle Push Bar Roll Towel Dispenser shall be Model TW-12RP of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet.
The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

Revised 2/01/16 Printed in U.S.A.
© 2016 by Gamco Commercial Restroom Accessories.